
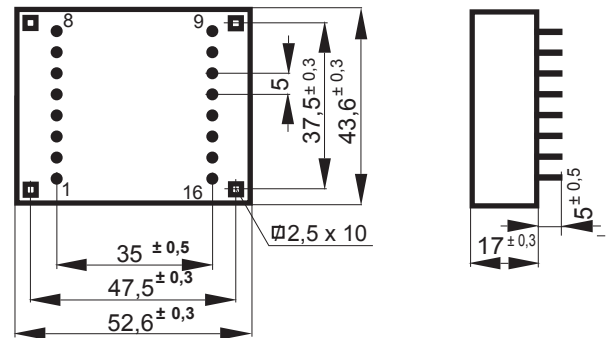


BLORE BOWRON


70 Sandford Lane Industrial Estate, Kennington Oxford, OX1 5RP
 Tel: +44 (0)1865 736686 Fax: +44 (0)1865 736678
 E-mail: Sales@blorebowron.co.uk

Encapsulated Low-Profile Transformers UI30 Size 2VA

VDE/UL/CSA/ENEC
 Certification

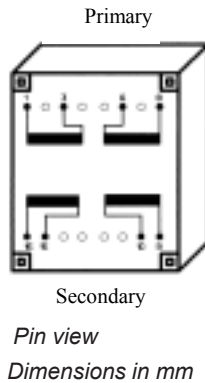

VDE-approved 0570 / EN 61558
ENEC10 and UL506 / CSA
Potted under vacuum
Split-Bobbin-Construction
Insulation Class ta 70° C/B
Weight: 0.125 kg

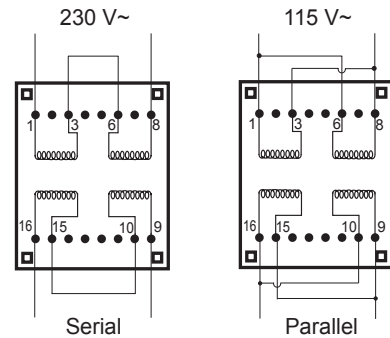

Power VA	Type	Height mm	Primary	Secondary	No Load Volts	Weight Grams	Part No
2VA	FLG30.5 / 60506	17	2 x 115v	2 x 6v	2 x 9.3v	125	L8501
	FLG30.5 / 60507			2 x 9v	2 x 13.4v		L8502
	FLG30.5 / 60508			2 x 12v	2 x 18v		L8503
	FLG30.5 / 60509			2 x 15v	2 x 22.5v		L8504
	FLG30.5 / 60510			2 x 18v	2 x 24.9v		L8505
	FLG30.5 / 60511			2 x 24v	2 x 34.2v		L8506

For conformance reasons transformers with 2x24v outputs should not have their secondaries connected in series
 Not VDE Approved
 Not classified as a safety transformer

Other primary and secondary voltage combinations are available upon request.