

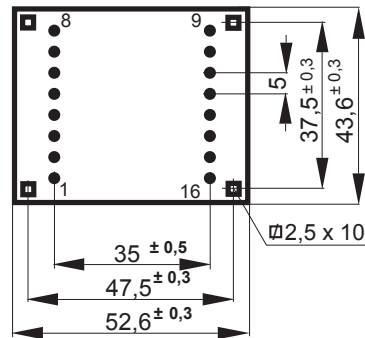


# BLORE BOWRON



70 Sandford Lane Industrial Estate, Kennington Oxford, OX1 5RP  
 Tel: +44 (0)1865 736686 Fax: +44 (0)1865 736678  
 E-mail: Sales@blorebowron.co.uk

## Encapsulated Low-Profile Transformers UI30 Size 4VA and 6VA Types

VDE/UL/CSA/ENEC  
 Certification

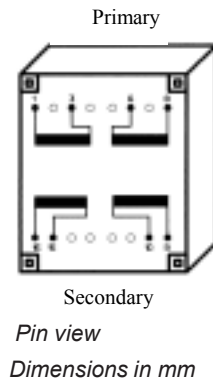

VDE-approved 0570 / EN 61558
ENEC10 and UL506 / CSA
Potted under vacuum
Split-Bobbin-Construction
Insulation Class ta 70° C/B
Weight: 0.150 Kg / 0.180Kg

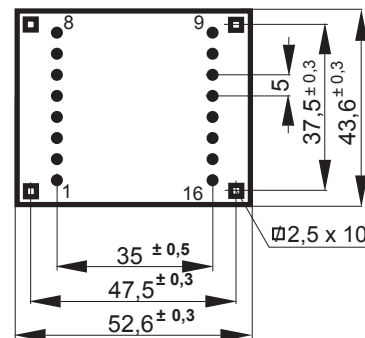

Power VA	Type	Height mm	Primary	Secondary	No Load Volts	Weight Grams	Part No
4VA	FLG30.7 / 60031-1	19	2 x 115v	2 x 6v	2 x 9.2v	150	L8508
	FLG30.7 / 60032-1			2 x 9v	2 x 13.7v		L8509
	FLG30.7 / 60004-1			2 x 12v	2 x 17.9v		L8510
	FLG30.7 / 60005-1			2 x 15v	2 x 22.4v		L8511
	FLG30.7 / 60036-1			2 x 18v	2 x 24v		L8512
	FLG30.7 / 60033			2 x 24v	2 x 35.4v		L8514
6VA	FLG30.10 / 60034-1	22.5	2 x 115v	2 x 6v	2 x 8.4v	180	L8515
	FLG30.10 / 60035-1			2 x 9v	2 x 12.4v		L8516
	FLG30.10 / 60007-1			2 x 12v	2 x 16.3v		L8517
	FLG30.10 / 60008-1			2 x 15v	2 x 20.3v		L8518
	FLG30.10 / 60009-1			2 x 18v	2 x 23.8		L8519
	FLG30.10 / 60036-1			2 x 24v	2 x 31.9v		L8521

For conformance reasons transformers with 2x24v outputs should not have their secondaries connected in series  
 Not VDE Approved  
 Not classified as a safety transformer

Other primary and secondary voltage combinations are available upon request.