

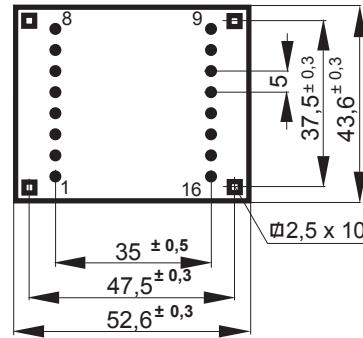


# BLORE BOWRON



70 Sandford Lane Industrial Estate, Kennington Oxford, OX1 5RP  
 Tel: +44 (0)1865 736686 Fax: +44 (0)1865 736678  
 E-mail: Sales@blorebowron.co.uk

## Encapsulated Low-Profile Transformers UI30 Size 10VA and 16VA Types

VDE/UL/CSA/ENEC  
 Certification

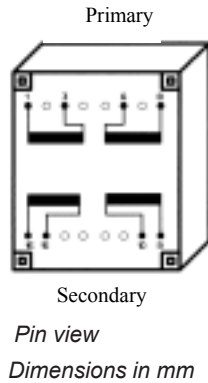

VDE-approved 0570 / EN 61558
ENEC10 and UL506 / CSA
Potted under vacuum
Split-Bobbin-Construction
Insulation Class ta 70° C/B
Weight: 0.260Kg / 0.300Kg

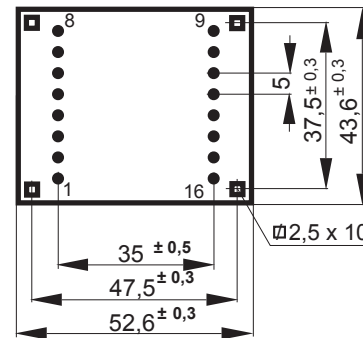

Power VA	Type	Height mm	Primary	Secondary	No Load Volts	Weight Grams	Part No
10VA	FLG30.16 / 60246-1	28	2 x 115v	2 x 6v	2 x 7.7v	260	L8581
	FLG30.16 / 60247-1			2 x 9v	2 x 11.5v		L8582
	FLG30.16 / 60010-1			2 x 12v	2 x 14.8v		L8583
	FLG30.16 / 60011-1			2 x 15v	2 x 18.4v		L8584
	FLG30.16 / 60012-1			2 x 18v	2 x 22.2v		L8585
	FLG30.16 / 60248-1			2 x 24v	2 x 30.5v		L8587
16VA	FLG30.26 / 60249-1	37.5	2 x 115v	2 x 6v	2 x 7.2v	300	L8600
	FLG30.26 / 60250-1			2 x 9v	2 x 10.6v		L8602
	FLG30.26 / 60013-1			2 x 12v	2 x 13.9v		L8603
	FLG30.26 / 60014-1			2 x 15v	2 x 17.8v		L8604
	FLG30.26 / 60015-1			2 x 18v	2 x 21v		L8605
	FLG30.26 / 60251-1			2 x 24v	2 x 28.6v		L8607

For conformance reasons transformers with 2x24v outputs should not have their secondaries connected in series  
 Not VDE Approved  
 Not classified as a safety transformer

Other primary and secondary voltage combinations are available upon request.