
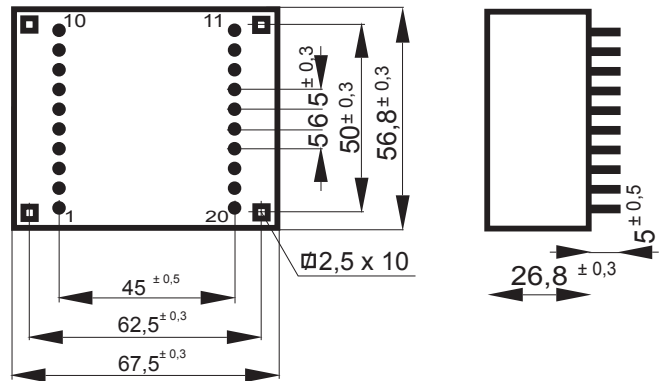


BLORE BOWRON


70 Sandford Lane Industrial Estate, Kennington Oxford, OX1 5RP
 Tel: +44 (0)1865 736686 Fax: +44 (0)1865 736678
 E-mail: Sales@blorebowron.co.uk

Encapsulated Low Profile Transformers UI39 Size 18VA Types

VDE/UL/CSA/ENEC
 Certification

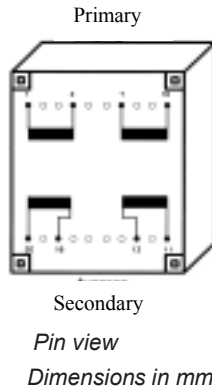

VDE-approved 0570 / EN 61558
ENEC10 and UL506 / CSA
Potted under vacuum
Split-Bobbin-Construction
Insulation Class ta 70° C/B
Weight: 0.375Kg

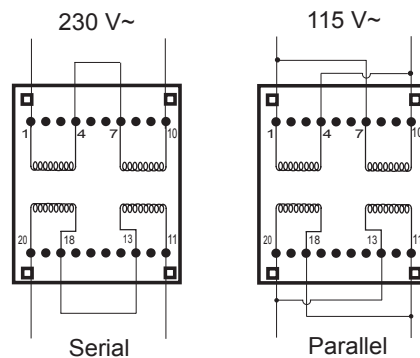

Power VA	Type	Height mm	Primary	Secondary	No Load Volts	Weight Grams	Part No
9/10VA	FLG39.13 / 60046-1	26.8	2 x 115v	2 x 6v	2 x 7.3v	375	L8536
	FLG39.13 / 60022-1			2 x 9v	2 x 11.3v		L8537
	FLG39.13 / 60023-1			2 x 12v	2 x 14.6v		L8538
	FLG39.13 / 60024-1			2 x 15v	2 x 17.9v		L8539
	FLG39.13 / 60061-1			2 x 18v	2 x 21.6v		L8540
	FLG39.13 / 60077-1			2 x 24v	2 x 28.5v		L8542

For conformance reasons transformers with 2x24v outputs should not have their secondaries connected in series
 Not VDE Approved
 Not classified as a safety transformer

Other primary and secondary voltage combinations are available upon request.